

NOVELIO

CLASSIC



Paintable wall coverings


Stronger ideas for a sustainable world





RI 50 x 1 m

STANDARD WALL COVERINGS

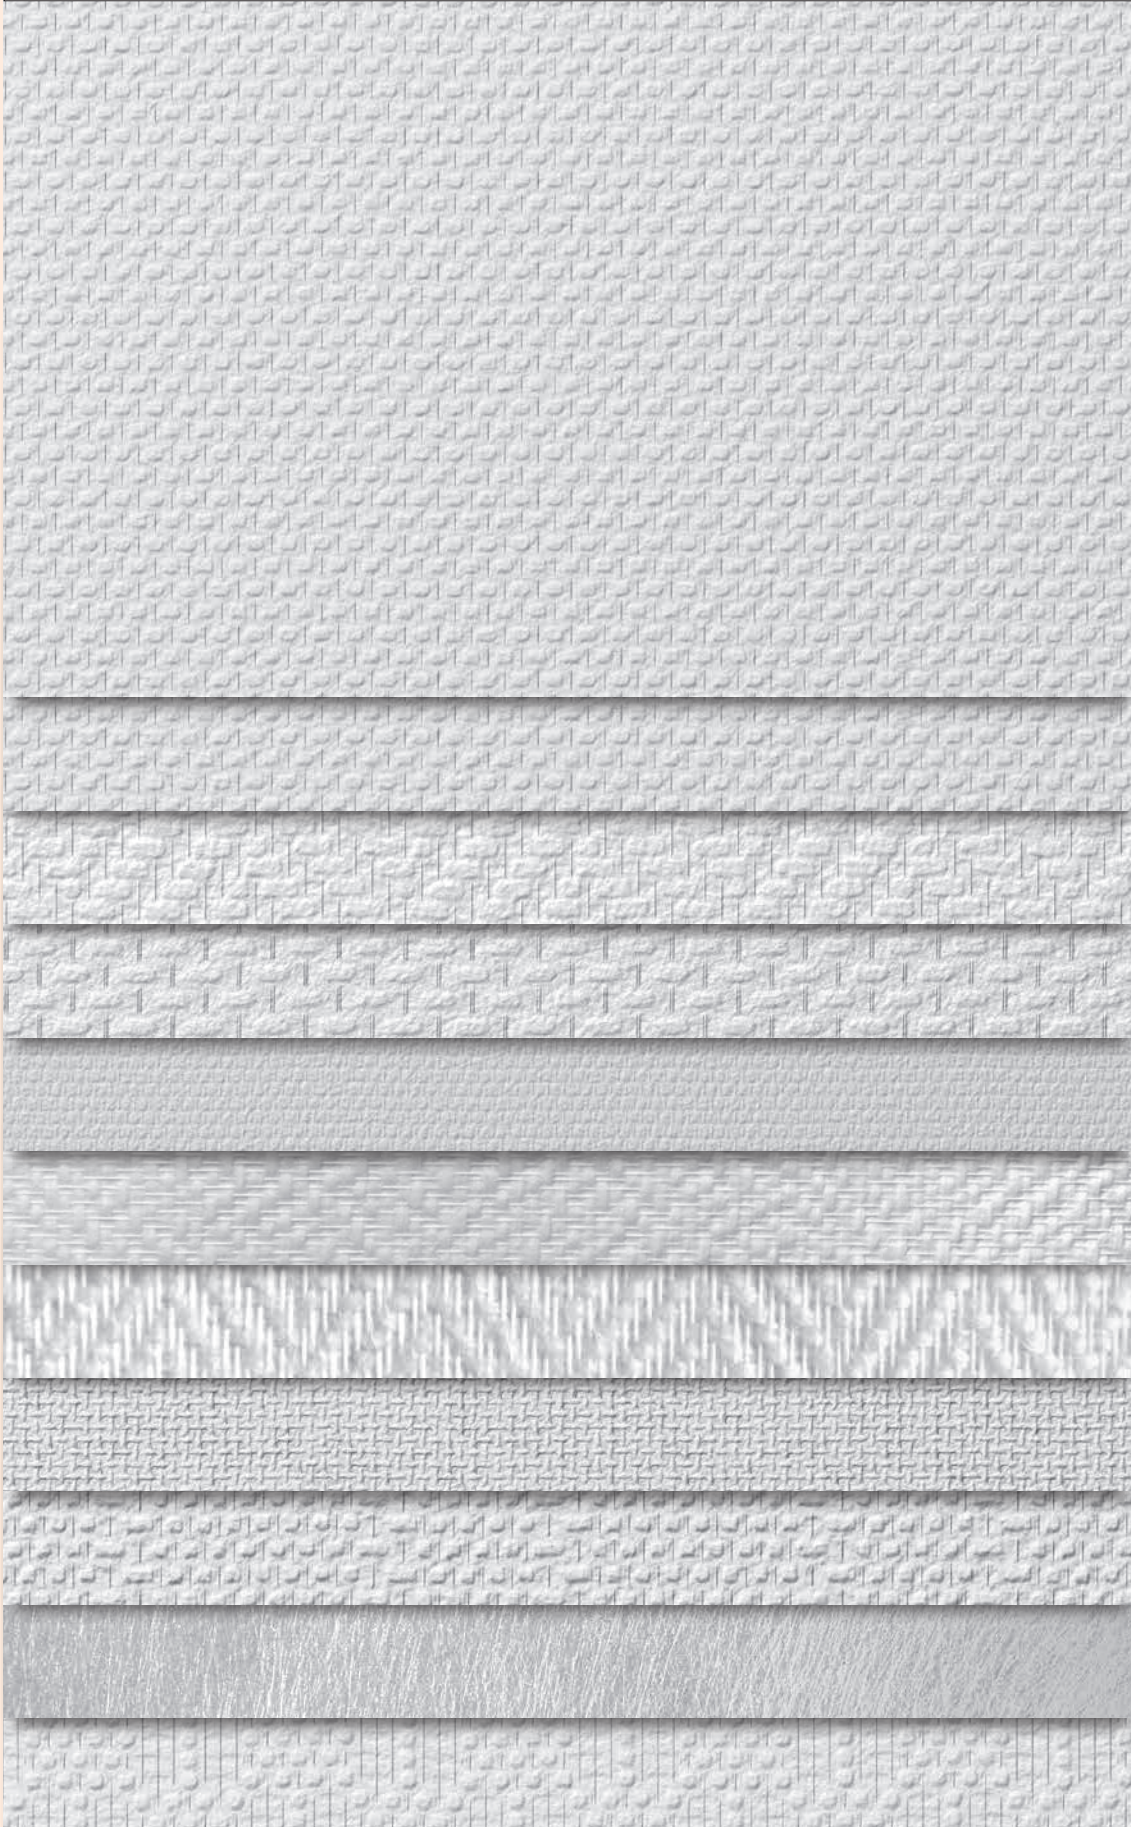

Weaving

T1012 - 120 g/m²

Weaving

T1010 - 145 g/m²

Fishbone

T2004 - 195 g/m²

Braid

T1009 - 200 g/m²

Ceiling

T1003 - 135 g/m²

Crepi

T3011 - 160 g/m²

Small Fishbone

T2101 - 180 g/m²

Small weaving

T1024 - 145 g/m²

Strip

T1005 - 175 g/m²

DecoVeil

GV45 - 45 g/m²

Mosaic


T1023 - 200 g/m²

NOVELIO
CLASSIC



RI 50 x 1 m

STANDARD WALL COVERINGS

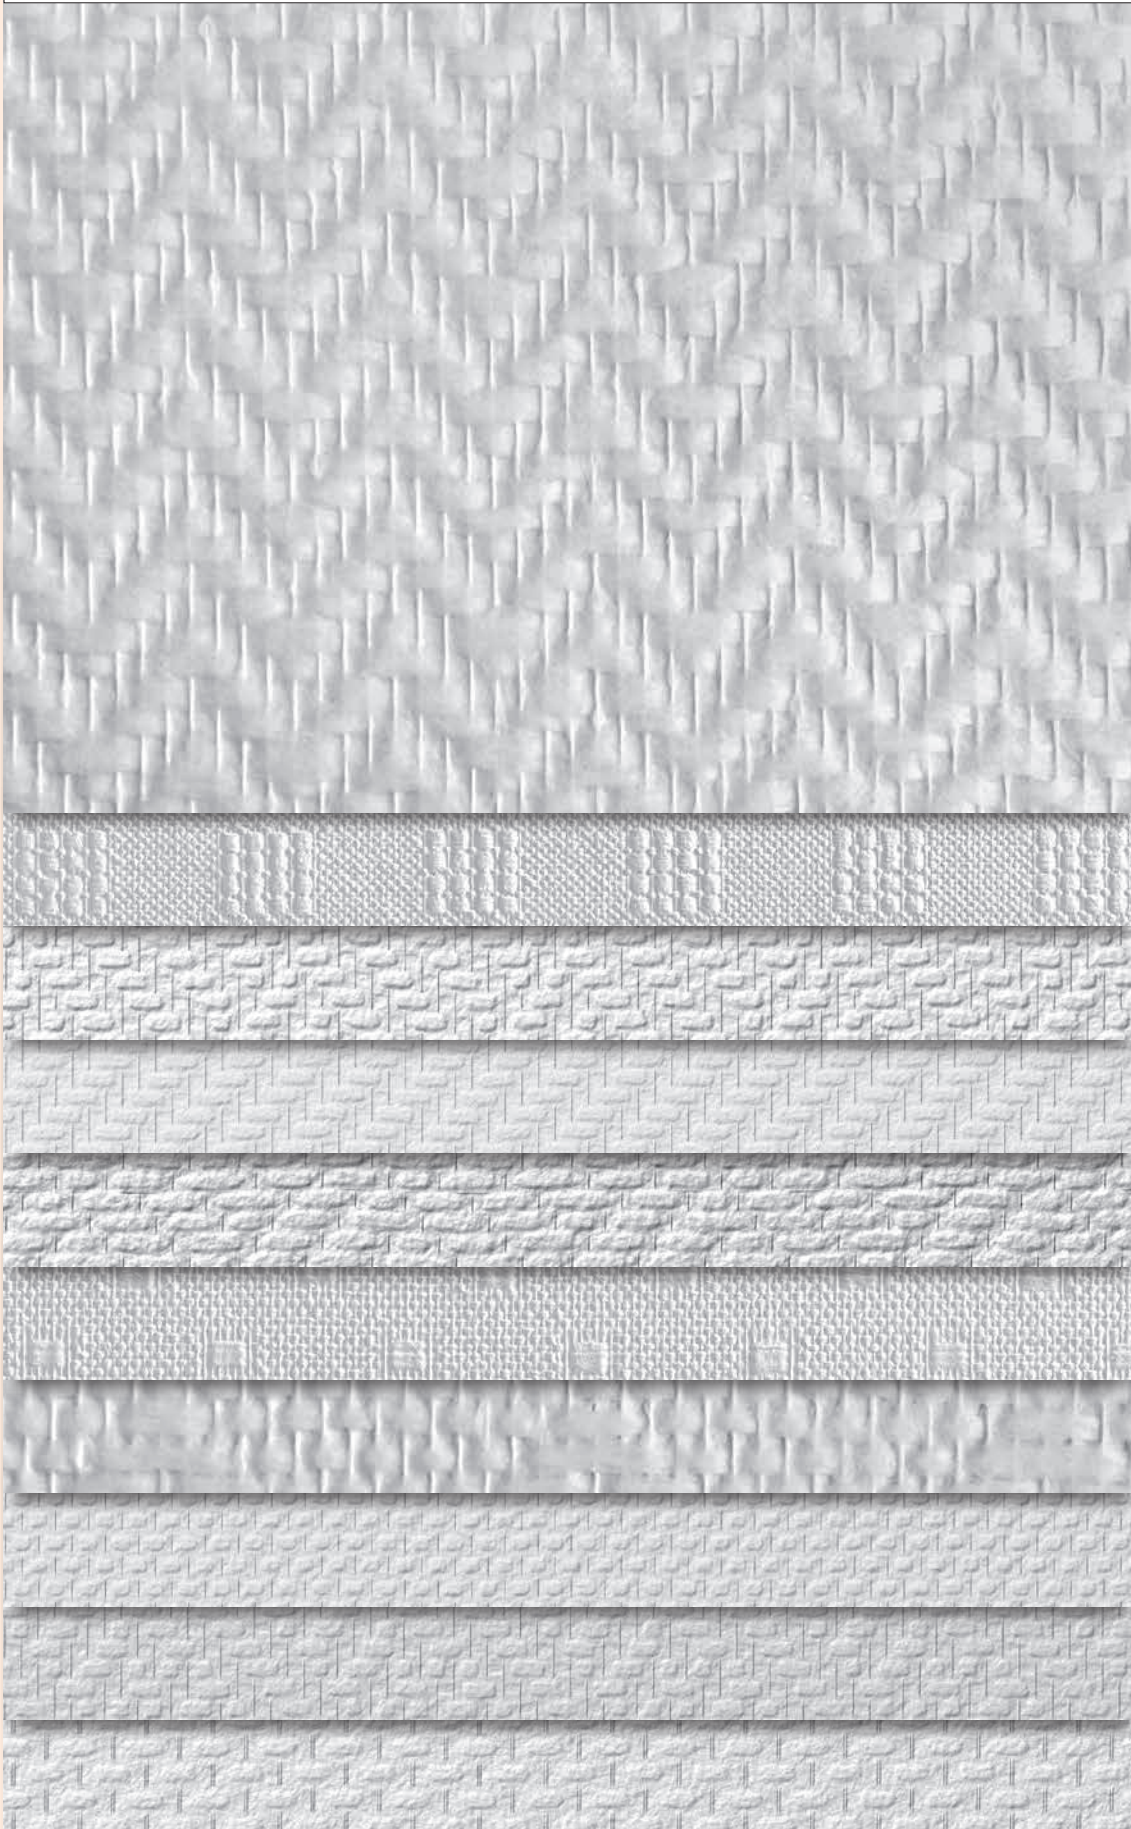

ZigZag

N0420 - 170 g/m²

Large Caro

N0139 - 210 g/m²

Domino

T2002 - 190 g/m²

Diagonal

T2005 - 170 g/m²

Lozenge

T2007 - 190 g/m²

Small Caro

T1030 - 185 g/m²

Conical

N0468 - 160 g/m²

Flamed

N0145 - 175 g/m²

Interlacing

T2014 - 195 g/m²

Relief

N0195 - 230 g/m²
Roll of 25 x 1 m


NOVELIO

CLASSIC



RI 50 x 1 m

PRE-PAINTED WALL COVERINGS

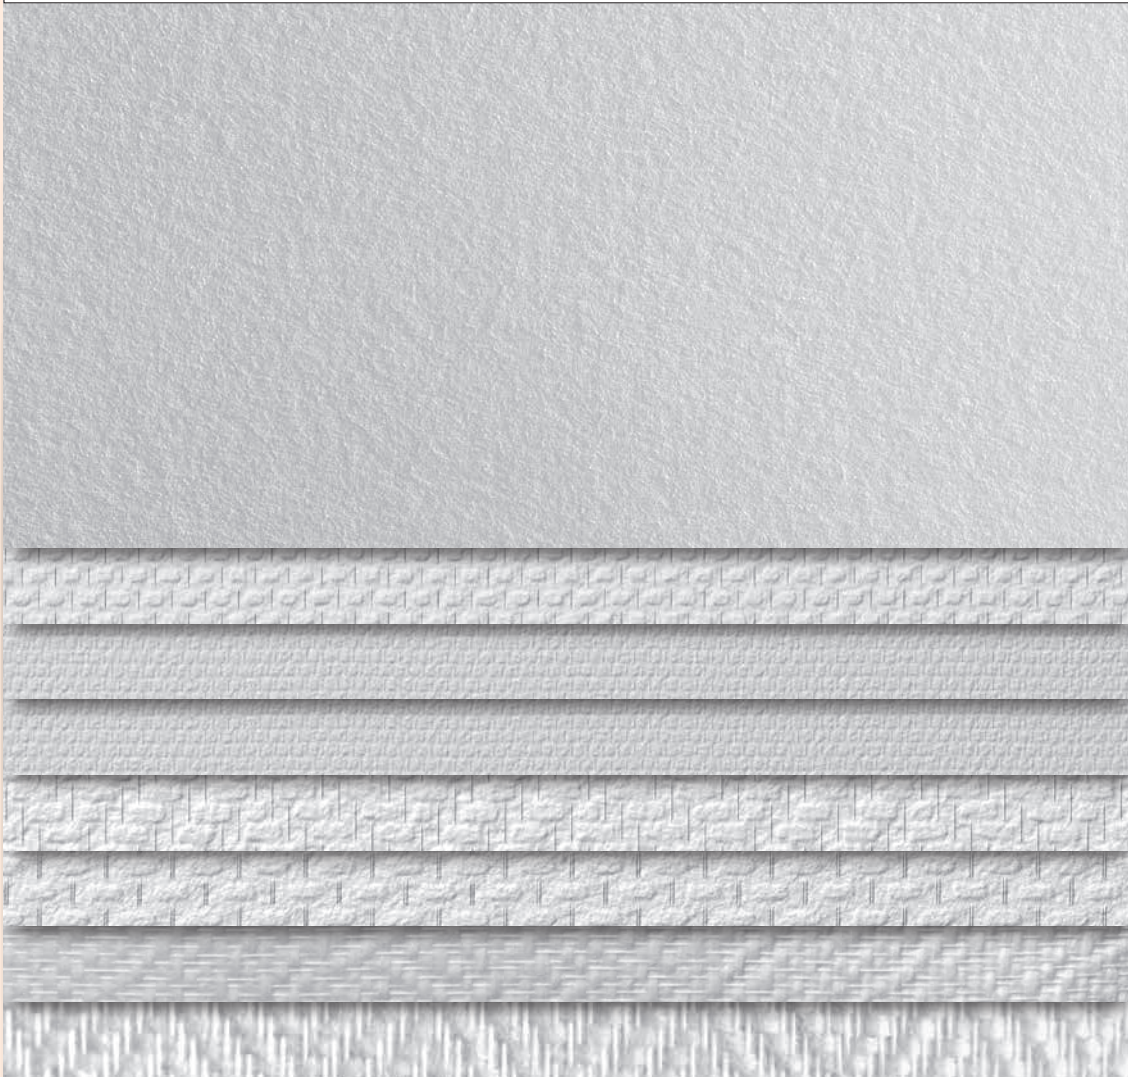

Decoveil

GV190C - 190 g/m²

Weaving

T1010C - 145 g/m²

Ceiling

T1006C - 155 g/m²

Metis

T1050C - 125 g/m²

Fishbone

T2004C - 195 g/m²

Braid

T1009C - 200 g/m²

Crepi

T3011C - 160 g/m²

Small fishbone

T2001C - 170 g/m²

SELF-ADHESIVE WALL COVERING

EASYFIX

EasyFix principle

This wall covering is **self-adhesive on the back side**. It guarantees:

- **Adhesiveness** of the wall covering to the wall until ready for painting
- Repositioning of the strip **up to 5 times**
- **Workability** in all conditions

EasyFix efficiency

- **20% saving in wall covering application time**: can be applied directly to the wall or ceiling. No need to glue the wall beforehand nor to use a wetting system
- **30% saving in a room renovation time**: can be painted immediately
- Once applied, the wall covering can be painted immediately. No need to wait 24 hours for the glue to dry. A room can be renovated in less than 2 days.



Weaving - T1038X - 125 g/m²

NOVELIO

CLASSIC



RI 50 x 1 m

PRE-GLUED WALL COVERINGS



Weaving

T1010EF - 180 g/m²



Decoveil

GV190CEF - 210 g/m²

Weaving

T1013CEF - 200 g/m²

Braid

T1009CEF - 250 g/m²

Fishbone

T2004CEF - 250 g/m²

Ceiling

T1006CEF - 185 g/m²

Crepine

T3111CEF - 270 g/m²

Small fishbone

T2101CEF - 215 g/m²



Saving time on construction work, the key for competitiveness

EasyGlue principle

EasyGlue wall covering is made with a **homogeneous film of glue** on one side. A **wetting system** is needed to reactivate the glue. It guarantees:

- The **immediate application** of the wall covering after wetting
- An **optimal adhesive performance** even for technical sections (ceilings, external angles, stairwells)
- The possibility to **move the strip** and to adjust so the joints are not visible

EasyGlue efficiency

- **30% saving on wall covering application time** and **more than 50%** if the product is **pre-painted**
- Clean and comfortable working conditions



NOVELIO

CLASSIC



The solution to all your requirements

Decorative, soft and resistant fiberglass wall coverings with several finishes

- **Standard**, a wide range of patterns to be applied in a traditional way
- **EasyPaint**, pre-painted wall coverings that save one layer of paint during application
- **EasyFix**, a self-adhesive product to be applied directly to the support and immediately painted
- **EasyGlue**, pre-glued products for an efficient application (glue must be reactivated with water)

Durable protection of walls and ceilings

- reinforces delicate surfaces
- abrasion resistant
- impact resistant
- covers small cracks and irregularities cracks


A range of certified products



Certificate Oeko-Tex Standard 100
no harmful substances



Fire reaction according to the standard
EN 13501-1: **Euroclass B-s1-d0**
on support A1 or A2

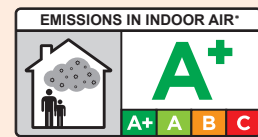

Emission of volatile organic
components: **Class A+**
(very low emission of harmful pollutants)

The commitments of Saint-Gobain ADFORS

Novelio® range respects the European requirements in safety, health and environmental protection.

- All our fiberglass wall coverings meet the conformity criteria applied to decorative wall coverings
- Saint-Gobain ADFORS ensures a quality control throughout the production process according to the standard procedures of EN 15102
- Saint-Gobain ADFORS adds the CE 1020 mark to all the labels according to the standard EN 15102
- Saint-Gobain ADFORS production sites are certified ISO9001 and ISO 14001
- Saint-Gobain ADFORS has performed a life cycle analysis of its fiberglass wall coverings NOVELIO®
- On request, Saint-Gobain ADFORS can provide extracts of the ESDS



Saint-Gobain ADFORS CPE
Phone: +420 461 651 111

For more information, visit our website www.novelio.com